

# HDE-V-C COMPACT SERIES

## Heavy Duty Emergency Telephones



HDE-35-V



HDE-25-V

### HDE-V COMPACT SERIES HELP POINTS

Guardian's HDE-V COMPACT SERIES telephones provide a two-way link to emergency, access or information assistance through full-duplex phone transmission in smaller dimensions. A call may be initiated from the phone by pushing the button which routes the call to its assigned extension. These phones also provide the capability of monitoring the status of each unit from a remote location, informing personnel of a malfunction. HDE-V Telephones are compatible with SIP-based IP-PBX servers that comply with SIP RFC 3261. See our Interoperability Guide for details.

Includes the new Guardian VoIP Sitara Class Control Module, fully redesigned with latest technology and enhancements and expandable and adaptable for future product development. Configuration changes can now be made and committed without a full reboot. Three drive partitions allows multiple versions of the firmware to be maintained. Logs and status bars are now included as part of the web interface. Improved hardware architecture to make field replacements of peripherals simple.

### HDE-V COMPACT SERIES HEAVY DUTY VOIP EMERGENCY & PUBLIC ACCESS TELEPHONES

- HDE-25-V-C – Wall Mount/Single
- HDE-35-V-C – Recessed/Single

### FEATURES and BENEFITS


- Smaller Dimensions, 8.0" x 6.0" ( 20.32mm x 15.24mm)
- VoIP Sitara Class Control Module
  - The new OS with web interface to support product configuration easier with logs and status bars. Enhanced self-diagnostics. Interactive help.
  - Supports the latest security protocols (ie: TLS1.2) while still maintaining backwards compatibility.
  - SSL Certificates are supported. Web Interface Screen for SSL. Allows import of web, client and auto provisioning Client Certificates.
  - Compatible with SIP-based IP-PBX servers that comply with SIP (RFC 3261).
- "Full" duplex operation.
- PoE 802.3af, 802.3at & 802.3bt enabled (Power-over-Ethernet) or alternate power source (24VDC).
- Full duplex voice w/adaptive echo canceling.
- Auxilliary Relay (5A) to control external devices with multiple control modes.
- Network web management interface.
- Real-Time monitoring with iGuard (iGuard is an encrypted, on prem or cloud-based platform that allows you to configure, monitor and maintain deployed Guardian endpoints).
- HDE-V models with an "Emergency" push button – depressing the button once automatically rings a designated number to summon help.
- Night ringer mode – refer to product manual.
- 316 Stainless Steel – 16 Gauge with #4 Brushed Finish, corrosion resistant enclosures
- LED – The call switches have integrated LEDs which can be configured for automatic or manual operation under multiple conditions.
- Speaker Output Power: 7W can exceed 90dB.
- ADA (American Disability Act) & Ontarians with Disabilities Act (AODA) compliant and labeled.
- Operating temp: -40° to +140°F ( -40° to +60°C).
- Supports CISCO SRST (User selectable) / Supports Mitel Resiliency (User Selectable).
- Easy bolt on module for high power internal/external hearing loop T-Coil Amplifier.
- VoIP Expansion Module - 802.3BT compliant POE for single LAN cable connection to both expansion module and VoIP Controller.

### APPLICATIONS

HDE-V Telephones are designed to provide reliable communications in environments subject to vandalism, moisture, dust and corrosive chemicals such as:

|                     |                        |                        |                 |
|---------------------|------------------------|------------------------|-----------------|
| Universities        | Public Access Areas    | ATMs                   | Amusement Parks |
| Secure Access Entry | Transit Authorities    | Public Safety Purposes | Road Networks   |
| Industrial Parks    | Building Entrances     | Elevators              | Muster Points   |
| Parking Facilities  | Plant Entry Gates      | Sporting Facilities    | Airports        |
| Medical Centers     | Senior Citizen Housing |                        |                 |
| Mass Transit        | and more ...           |                        |                 |

## OVERALL DIMENSIONS

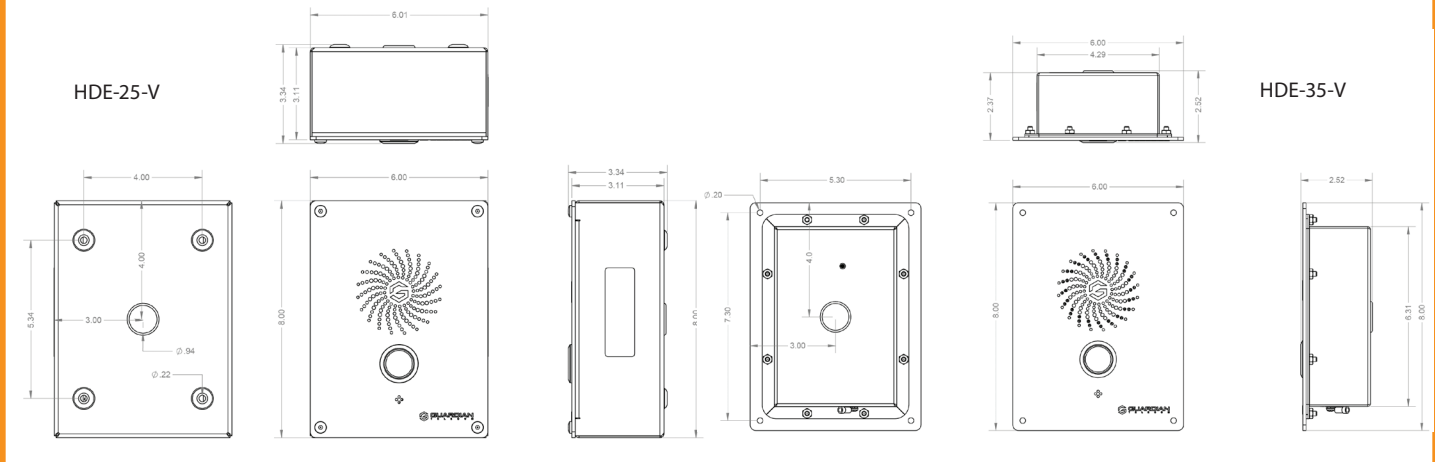

HDE-V COMPACT SERIES Heavy Duty Emergency & Public Access IP Telephones

## ENGINEERING SPECIFICATIONS

### ELECTRICAL SPECIFICATIONS

#### Power Requirements

Method 1 – Thru LAN: POE 802.3af, 802.3at & 802.3bt\*

\*POE requirement depending on external device use

Method 2 – External Power

Aux / Notification Relay

30VDC @ 0.5A Form A+Form B Solid State (not fused) (Load Type: Resistive)

Optical Isolated Inputs (qty 4)

On-board current limited for 3-5V Input

Optical Isolated Outputs (qty 4)

Max Switching Voltage: 30VDC @ 150mA Network Rate

10/100 Mbps

Protocol

Codecs Supported:

Switch OR via POE Injector

24VDC @ 1A

15mA Max

On-board current limited for 3-5V Input

SIP (RFC 3261 Compliant)

G.711 (Mu-law)

G.711 (A-law)

G.729.1 (G729) and (G729EV)

G.722.1 (SIREN7)

G.722.2 (AMR-WB)

7W

Speaker Output Levels (1KHz @ 1Meter)\*

Speaker Output (dB):

Level 9 92.4 - Level 8 91.2 - Level 7 90.4 - Level 6 88.2 - Level 5 85.1 - Level 4 82.3 - Level 3 79.4 -

Level 2 76.1 - Level 1 71.7 - Level 0 Mute

\*SPL sound levels based on in-house lab testing and subject to variances.

Paging / Mass Notification Amplifier (H/W enabled, future F/W Release)

### MECHANICAL SPECIFICATIONS

Body Construction

Finish

Hardware Material

Net Weight

HDE-25-V-C

HDE-35-V-C

Mounting

Wiring Access

HDE-25-V-C and HDE-35-V-C

Supplied Fittings

316 Stainless Steel – 16 Gauge,

#4 Brushed Finish

Stainless Steel

3.5 lbs ( 1.6 kg )

4 lbs ( 1.8 kg )

Vertical Wall or Recessed

Two 7/8" Holes For Owner

### SHIPPING SPECIFICATIONS

HDE-25-V-C

Shipping Carton Weight

Shipping Carton Dimensions ( L x W x D )

HDE-35-V-C

Shipping Carton Weight

Shipping Carton Dimensions ( L x W x D )

5.0 lbs ( 2.3 kg )

10" x 9" x 6" ( 254 x 228 x 152 mm )

6.0 lbs ( 0.2.7kg )

16" x 13" x 11" ( 406 x 330 x 279 mm )

### ENVIRONMENTAL

Operating temp:

Storage Temp:

-40° to +140°F ( -40° to +60°C )

-58° to +176°F ( -50° to +80°C )

### COMPLIANCE

FCC

Canada

European Commission Directives:

Title 47, Part 15

ICES-003 / NMB-A

2014/30/EU & 2014/35/EU

EN55032:2015

EN55035:2017/A11:2020

Railway EN50121

Refer to Guardian Telecom SDOC for additional details



† This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### VoIP SITARA CLASS CONTROL MODULE CONFIGURATION ENHANCEMENTS

Easy one click activation for device changes - no full reboot required.

Timed Auto-Answer.

User defined I/O monitoring and notification events with iGuard.

Improved auto provisioning for f/w / configuration updates.

### VoIP SITARA CLASS CONTROL MODULE HARDWARE ENHANCEMENTS

New Screwless Terminal Block for ease of installation.

4 Opto-Isolated inputs - Can use for monitoring external sensors, alarms, etc.

4 Opto-Isolated Outputs - Can use for control of external devices.

### ORDERING INFORMATION

Warranty: Five years parts and labor

Order No. Description

SURFACE MOUNT SERIES

P6949 HDE-25-V, Single Call Button, Surface Mount, VoIP

RECESSED MOUNT SERIES

P6944 HDE-35-V, Single Call Button, Recessed Mount, VoIP



GUARDIAN TELECOM LTD.  
Calgary, Alberta, Canada  
Telephone: 403 258 3100 Facsimile: 403 255 2595  
1 800 363 8010 (North America)  
sales@guardiantelecom.com | www.guardiantelecom.com

